



Maverick™ HM

Bridge Plug


Hydro/Mechanical

Introducing the Maverick™ Bridge Plug: a specialized plug that has gained widespread acclaim in Canada for its versatility reminiscent of HM-1 tool set plugs from the past. Available in both 10k (Maverick™-10 shown) and 6k (Maverick™-6) maximum pressure ratings, the Maverick™ is engineered to meet the diverse needs of modern applications. Experience the reliability and adaptability of the Maverick™ Bridge Plug for your operations.

The Maverick™ Bridge Plug is manufactured with drillable materials for rapid drill out.

FEATURES

- Drillable cast iron construction
- One piece grips
- Sets in any grade casing including P-110
- Form-fitting metal back-ups prevent rubber extrusion
- For temporary or permanent service
- Ratcheting lock ring holds setting force

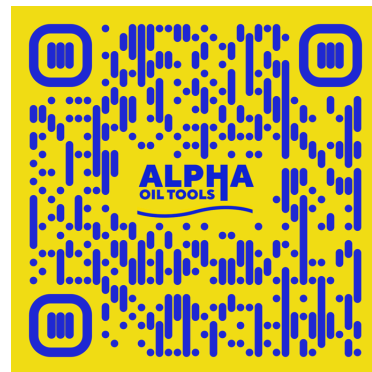

Maverick™ HM

Bridge Plug

Hydro/Mechanical



Maverick™ 6k

Part Number	Plug OD	Tubing/Casing O.D. inches	Tubing/Casing Weight lbs/ft	Setting Range Min. Inches	Setting Range Max. Inches	Max Pressure psi	Max Temperature	Setting Sleeve
011-3500-065	3.50	4 1/2	9.5 - 15.1	3.826	4.090	6000	200F	005-3593-200
011-4240-065	4.24	5 1/2	15.5— 26	4.548	5.012	6000	200F	005-4312-200
000-4240-065	4.24	5 3/4	21.8—24.2	4.548	5.012	6000	200F	005-4312-200
011-5610-065	5.61	6 5/8	20 - 24	5.921	6.538	6000	200F	005-5687-200
011-5610-065	5.61	7	20 — 35	5.921	6.538	6000	200F	005-5687-200



Maverick™ 10k

Part Number	Plug OD	Tubing/Casing O.D. (in)	Tubing/Casing Weight(lbs/ft)	Setting Range Min. (In)	Setting Range Max. (In)	Max Pressure (psi)	Max Temperature	Setting Sleeve
011-3500-055	3.50	4 1/2	9.5 - 15.1	3.826	4.090	10,000	250F	005-3593-200
011-4240-055	4.24	5 1/2	15.5— 26	4.548	5.012	10,000	250F	005-4312-200
011-4240-055	4.24	5 3/4	21.8—24.2	4.548	5.012	10,000	250F	005-4312-200
011-5610-055	5.61	6 5/8	20 - 24	5.921	6.538	10,000	250F	005-5687-200
011-5610-055	5.61	7	20 — 35	5.921	6.538	10,000	250F	005-5687-200



alphaoiltools.com