


FH CEMENT RETAINER

Introducing the **Model FH™ Sleeve Valve Cement Retainer**, a versatile solution designed for efficient one-trip operations when paired with the Alpha Model FH™ Hydraulic Setting Tool. Rotation is unnecessary, making it ideal for deviated wells and challenging conditions where mechanical or wireline set cement retainers may not be suitable. Controlled by a sliding sleeve valve, operation is simplified: pick up 2" to close and set down weight to open for squeezing.

FEATURES

- Hydro Set with FH™ Hydraulic Setting Tool
- Electric wireline set
- Drillable cast iron construction
- Sets in any grade casing including P-110
- Form-fitting metal back-ups prevent rubber extrusion
- For permanent service
- Ratcheting lock ring holds setting force
- Can be upgraded to 400F temperature rating upon request

Part Number	OD (in)	Setting Range Min (in)	Setting Range Max (in)	Hydraulic Setting Tool	Max Pressure (psi)
005-1750-500	1.750	1.931	2.089	019-1750-200	5,000
005-2187-500	2.187	2.373	2.494	019-2125-200	5,000
005-2725-500	2.725	2.843	3.047	019-2125-200	5,000
005-2750-500	2.750	2.843	3.047	019-2125-200	5,000
005-3125-500	3.125	3.340	3.548	019-2125-200	5,000
005-3593-500	3.593	3.826	4.090	019-3500-200	5,000
005-4312-500	4.312	4.560	5.044	019-3500-200	5,000
005-5687-500	5.687	6.004	6.560	019-5312-200	10,000
005-6312-500	6.312	6.625	7.025	019-5312-200	10,000
005-8125-500	8.125	8.535	9.001	019-5312-200	8,000
005-9437-500	9.437	9.660	10.192	019-5312-200	5,000
005-9500-500	9.500	9.850	10.369	019-5312-200	5,000
005-1200-500	12.00	12.347	12.715	019-5312-200	3,000
005-1425-500	14.25	14.688	15.250	019-5312-200	2,000

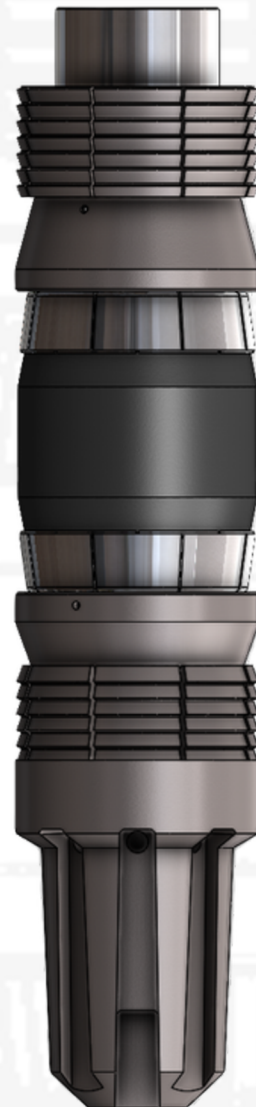

ALPHA
OIL TOOLS

Made In The USA